


# T-Slot Bolts

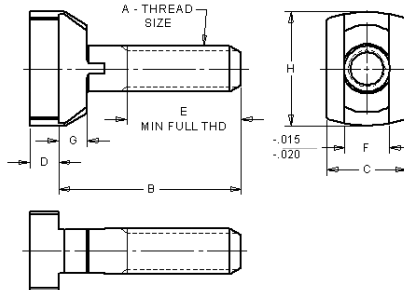

## Jergens Feature:


Protect your expensive machine table slots with Jergens T-Slot Bolts. The completely finished machined head provides at least 50% more bearing surface under your table slot. T-Slot Bolts outlast T-Bolts in wearability in most applications.

- Material: Alloy Steel
- Finish: Black Oxide
- Heat Treat: Rc 34-38
- Thread: 2A-UNC
- Available in lengths up to 24"

Part Number	Thread Size A	B	C	D	E	F	G	H	Wt. (lbs)
44101	1/2-13	2	7/8	5/16	1 1/4	1/2	9/32	1 1/4	.22
44102	1/2-13	2 1/2	7/8	5/16	1 3/4	1/2	9/32	1 1/4	.25
44103	1/2-13	3	7/8	5/16	2 1/4	1/2	9/32	1 1/4	.27
44104	1/2-13	3 1/2	7/8	5/16	2 3/4	1/2	9/32	1 1/4	.30
44105	1/2-13	4	7/8	5/16	3 1/4	1/2	9/32	1 1/4	.33
44106	1/2-13	5	7/8	5/16	4 1/4	1/2	9/32	1 1/4	.37
44107	1/2-13	6	7/8	5/16	5 1/4	1/2	9/32	1 1/4	.44
44108	1/2-13	8	7/8	5/16	7 1/4	1/2	9/32	1 1/4	.53
44301	5/8-11	2	1 1/8	3/8	1 1/8	5/8	3/8	1 1/2	.39
44302	5/8-11	2 1/2	1 1/8	3/8	2 5/8	5/8	3/8	1 1/2	.41
44303	5/8-11	3	1 1/8	3/8	2 1/8	5/8	3/8	1 1/2	.44
44304	5/8-11	3 1/2	1 1/8	3/8	2 5/8	5/8	3/8	1 1/2	.50
44305	5/8-11	4	1 1/8	3/8	3 1/8	5/8	3/8	1 1/2	.55
44306	5/8-11	5	1 1/8	3/8	4 1/8	5/8	3/8	1 1/2	.62
44307	5/8-11	6	1 1/8	3/8	5 1/8	5/8	3/8	1 1/2	.72
44308	5/8-11	8	1 1/8	3/8	7 1/8	5/8	3/8	1 1/2	.85
44309	5/8-11	10	1 1/8	3/8	9 1/8	5/8	3/8	1 1/2	1.00
44310	5/8-11	12	1 1/8	3/8	11 1/8	5/8	3/8	1 1/2	1.25
44502	3/4-10	2 1/2	1 5/16	7/16	1 1/2	3/4	7/16	1 3/4	.64
44503	3/4-10	3	1 5/16	7/16	2	3/4	7/16	1 3/4	.70
44504	3/4-10	3 1/2	1 5/16	7/16	2 1/2	3/4	7/16	1 3/4	.77
44505	3/4-10	4	1 5/16	7/16	3	3/4	7/16	1 3/4	.85
44506	3/4-10	5	1 5/16	7/16	4	3/4	7/16	1 3/4	.95
44507	3/4-10	6	1 5/16	7/16	5	3/4	7/16	1 3/4	1.05
44508	3/4-10	8	1 5/16	7/16	7	3/4	7/16	1 3/4	1.25
44509	3/4-10	10	1 5/16	7/16	9	3/4	7/16	1 3/4	1.45
44510	3/4-10	12	1 5/16	7/16	11	3/4	7/16	1 3/4	1.75
44701	1-8	3 1/2	1 11/16	1/2	2 1/2	1	1/2	2 1/4	1.25
44702	1-8	4	1 11/16	1/2	3	1	1/2	2 1/4	1.50
44703	1-8	4 1/2	1 11/16	1/2	3 1/2	1	1/2	2 1/4	1.62
44704	1-8	5	1 11/16	1/2	4	1	1/2	2 1/4	1.75
44705	1-8	6	1 11/16	1/2	5	1	1/2	2 1/4	2.00
44706	1-8	8	1 11/16	1/2	7	1	1/2	2 1/4	2.40
44707	1-8	10	1 11/16	1/2	9	1	1/2	2 1/4	2.75
44708	1-8	12	1 11/16	1/2	11	1	1/2	2 1/4	3.10

WORKHOLDING COMPONENTS

## T-Bolts

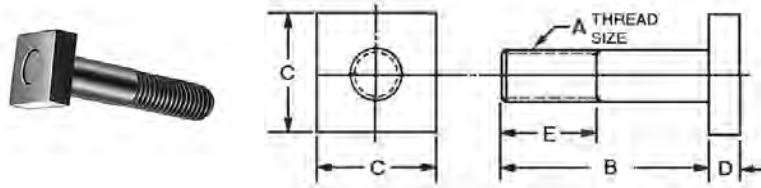

- Material: Alloy Steel
- Finish: Black Oxide
- Heat Treat: Rc 34-38
- Thread: 2A-UNC
- Available in lengths up to 24"

Part Number	Thread Size A	B	C	D	E	Wt. (lbs)
42101	3/8-16	1 1/2	11/16	1/4	3/4	.07
42102	3/8-16	2	11/16	1/4	1 1/4	.08
42103	3/8-16	2 1/2	11/16	1/4	1 1/4	.09
42104	3/8-16	3	11/16	1/4	1 1/2	.11
42105	3/8-16	3 1/2	11/16	1/4	1 1/2	.12
42106	3/8-16	4	11/16	1/4	1 1/2	.14
42301	1/2-13	1 1/2	7/8	1/4	3/4	.12
42302	1/2-13	2	7/8	1/4	1 1/4	.14
42303	1/2-13	2 1/2	7/8	1/4	1 1/4	.17
42304	1/2-13	3	7/8	1/4	1 1/2	.20
42305	1/2-13	3 1/2	7/8	1/4	1 1/2	.22
42306	1/2-13	4	7/8	1/4	2	.25
42307	1/2-13	4 1/2	7/8	1/4	2	.27
42308	1/2-13	5	7/8	1/4	2	.30
42309	1/2-13	5 1/2	7/8	1/4	2	.33
42310	1/2-13	6	7/8	1/4	2	.36
42502	5/8-11	2	1 1/8	3/8	1 1/4	.28
42503	5/8-11	2 1/2	1 1/8	3/8	1 1/4	.33
42504	5/8-11	3	1 1/8	3/8	1 1/2	.37
42505	5/8-11	3 1/2	1 1/8	3/8	1 1/2	.41
42506	5/8-11	4	1 1/8	3/8	1 1/2	.44
42507	5/8-11	5	1 1/8	3/8	1 1/2	.53
42508	5/8-11	6	1 1/8	3/8	1 1/2	.61
42509	5/8-11	8	1 1/8	3/8	3	.78
42510	5/8-11	10	1 1/8	3/8	3	.97
42701	3/4-10	2 1/2	1 1/4	1/2	1 1/4	.48


Part Number	Thread Size A	B	C	D	E	Wt. (lbs)
42702	3/4-10	3	1 1/4	1/2	1 1/2	.55
42703	3/4-10	3 1/2	1 1/4	1/2	1 1/2	.61
42704	3/4-10	4	1 1/4	1/2	1 1/2	.66
42705	3/4-10	5	1 1/4	1/2	1 1/2	.78
42706	3/4-10	6	1 1/4	1/2	1 1/2	.90
42707	3/4-10	8	1 1/4	1/2	3	1.17
42708	3/4-10	10	1 1/4	1/2	3	1.38
42709	3/4-10	12	1 1/4	1/2	3	1.62
42901	1-8	4	1 11/16	11/16	2 1/2	1.25
42902	1-8	5	1 11/16	11/16	2 1/2	1.50
42903	1-8	6	1 11/16	11/16	2 1/2	1.75
42911	1-8	7	1 11/16	11/16	2 1/2	1.88
42904	1-8	8	1 11/16	11/16	3	2.00
42912	1-8	9	1 11/16	11/16	3	2.25
42905	1-8	10	1 11/16	11/16	3	2.50
42906	1-8	12	1 11/16	11/16	3	3.00
42907	1-8	14	1 11/16	11/16	3	3.50
43003	1 1/4-7	8	1 7/8	7/8	5	3.65
43004	1 1/4-7	9	1 7/8	7/8	5	4.00
43005	1 1/4-7	10	1 7/8	7/8	5	4.35
43006	1 1/4-7	12	1 7/8	7/8	5	5.05
43007	1 1/4-7	14	1 7/8	7/8	5	5.75
43008	1 1/4-7	16	1 7/8	7/8	5	6.45
43009	1 1/4-7	18	1 7/8	7/8	5	7.15
43011	1 1/4-7	22	1 7/8	7/8	5	8.20
43012	1 1/4-7	24	1 7/8	7/8	5	9.25

## Dovetail Bolts



Dovetail Bolts can be used for clamping guide members on the front of press brakes.

- Material: Alloy Steel
- Finish: Black Oxide
- Heat Treat: Rc 34-38
- Thread: 2A-UNC

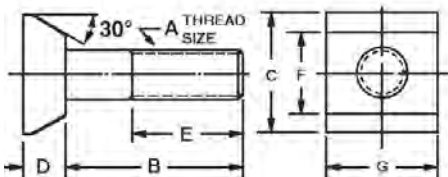

Part Number	Thread Size A	B	C	D	E	F	G	Wt. (lbs) 10 Pcs.
17901	5/8-11	1 1/4	1 1/16	3/8	3/4	3/4	1 1/8	2.00
17902	5/8-11	2	1 1/16	3/8	1 1/8	3/4	1 1/8	2.30
17903	5/8-11	2 3/4	1 1/16	3/8	1 1/2	3/4	1 1/8	3.10
17904	5/8-11	3 3/4	1 1/16	3/8	1 1/2	3/4	1 1/8	5.15